

TESLA MODEL 3


4









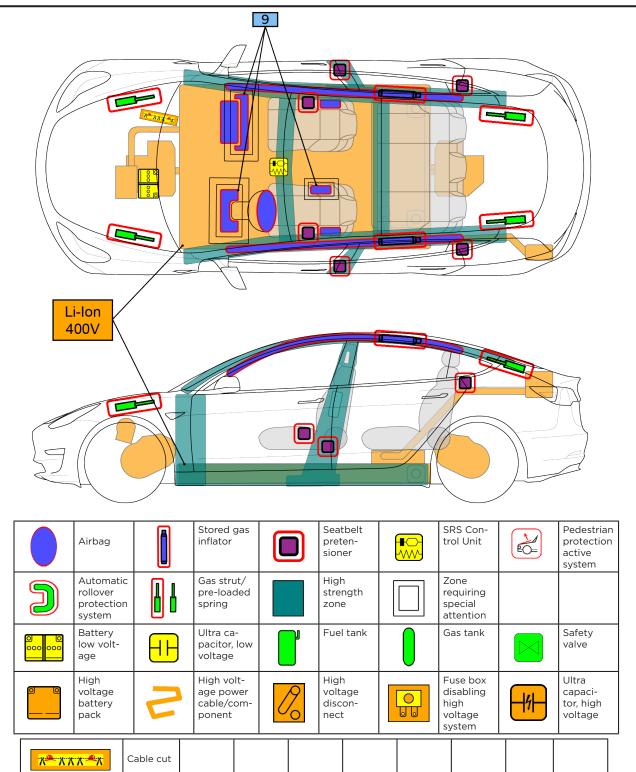

T	TESLA MODEL 3
	From 2020 - Present

ID No.	Version No.	Page No.
TESLA-202012-003	01	01/04

1. Identification / recognition



WARNING LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE).





NOTE: The Tesla emblem indicates a fully electric vehicle.

NOTE: The model name does not appear on the exterior of the vehicle.

2. Immobilization / stabilization / lifting

IMMOBILIZATION


1. CHOCK WHEELS



2. PUT VEHICLE INTO PARK POSITION



STABILIZATION/ LIFTING POINTS




Appropriate lift areas
Safe stabilization points for Model 3 resting on its side
High Voltage (HV) Battery

3. Disable direct hazards / safety regulations


ACCESS

- 1. Open the hood (see chapter 4).
- 2. Remove the access panel by pulling it upward to release the clips that hold it in place.



MAIN DISABLE METHOD

- 1. <u>Double cut</u> the first responder loop.
- 2. Disable the 12V battery.

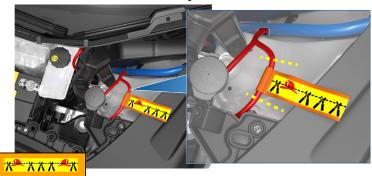



WARNING Not every high voltage component is labeled. Always wear appropriate PPE. Always double cut the first responder loop. Do not attempt to open the High Voltage (HV) battery.



			ı
TESLA MODEL 3	ID No.	Version No.	Page No.
From 2020 — Present	TESLA-202012-001	01	02/04

4. Access to the occupants




WARNING Electrical and mechanical releases may be compromised after a collision.



NOTE: The seats and steering wheel are electrically powered and may not function after a collision.

NOTE: After a collision, the doors and trunk lid may not unlock from the outside. Extrication may be required. See the Model 3 Emergency Response Guide for more information.

NOTE: The side windows on Model 3 are made of tempered or laminated safety glass.

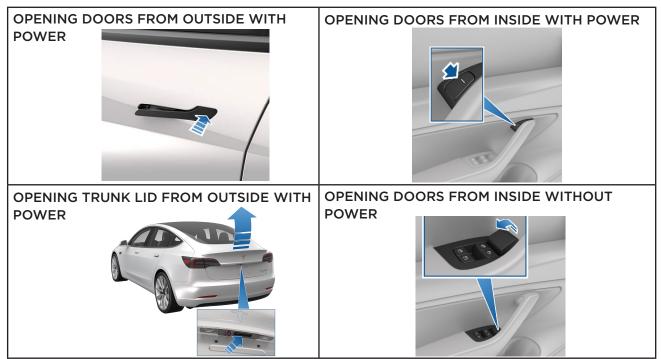

OPENING THE HOOD WITH POWER

To open the hood with 12V power enabled, touch the associated OPEN button on the touchscreen.

OPENING THE HOOD USING EXTERNAL 12V POWER SUPPLY


NOTE: The following will not open the front trunk if Model 3 is locked and has 12V power.



2.



5. Stored energy / liquids / gases / solids

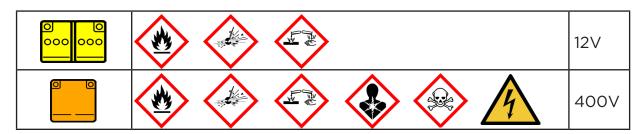



WARNING The cells in the HV battery are sealed and there is not enough electrolyte to create a pool of liquid. Clear liquid is likely water. The coolant is blue.



TESLA MODEL 3	ID No.	Version No.	Page No.
From 2020 — Present	TESLA-202012-001	01	03/04

6. In case of fire

















DO NOT SUBMERGE VEHICLE TO EXTINGUISH/COOL BATTERY FIRE



USE COPIOUS AMOUNTS OF WATER



POSSIBLE BATTERY RE-IGNITION!

MONITOR HV BATTERY TEMPERATURE FOR AT LEAST 24 HOURS

7. In case of submersion

Treat a submerged Model 3 like any other submerged vehicle. Wear appropriate PPE for water rescue. Remove the vehicle from the water and continue with normal high voltage disabling. Vehicles submerged in salt water should be handled with a greater potential risk of an HV battery fire. Tilt the vehicle to back and forth to allow water to drain out and store flat.

8. Towing / transportation / storage

Use a towing truck with flatbed.

NO towing with running traction wheels.











WARNING POSSIBLE BATTERY RE-IGNITION! AFTER A FIRE INCIDENT, STORE OUTSIDE AT A SAFE DISTANCE (50 FT/15 M) FROM OTHER VEHICLES AND STRUCTURES!

9. Important additional information

First Responders and Second Responders with emergencies, call Tesla Roadside Assistance. Refer to https://www.tesla.com/support/roadside-assistance for the applicable hotline number.

First responder information can be found at https://www.tesla.com/firstresponders. First responders and training officers who have questions, contact firstrespondersafety@tesla.com.

Airbags



Knee airbags are only installed in North America and South Korea.

10. Explanation of pictograms



In some working environments, the Infrared (IR) device is referred to as a Thermal Imaging Camera (TIC).

TESLA MODEL 3	ID No.	Version No.	Page No.
From 2020 — Present	TESLA-202012-001	01	04/04